



TMS320DM365 EVM Quick Start Guide

Translate this page to Translate Show original

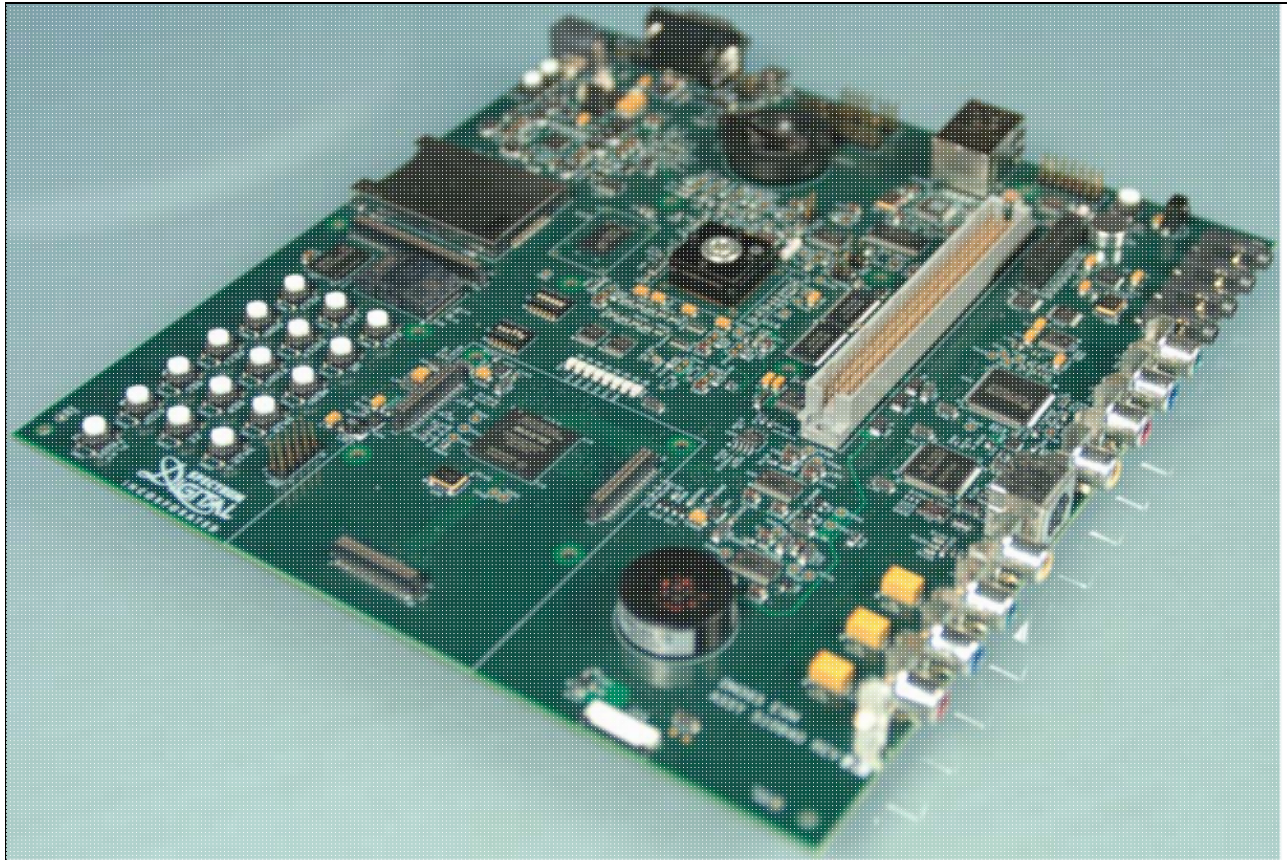

TMS320DM365 Digital Video Evaluation Module

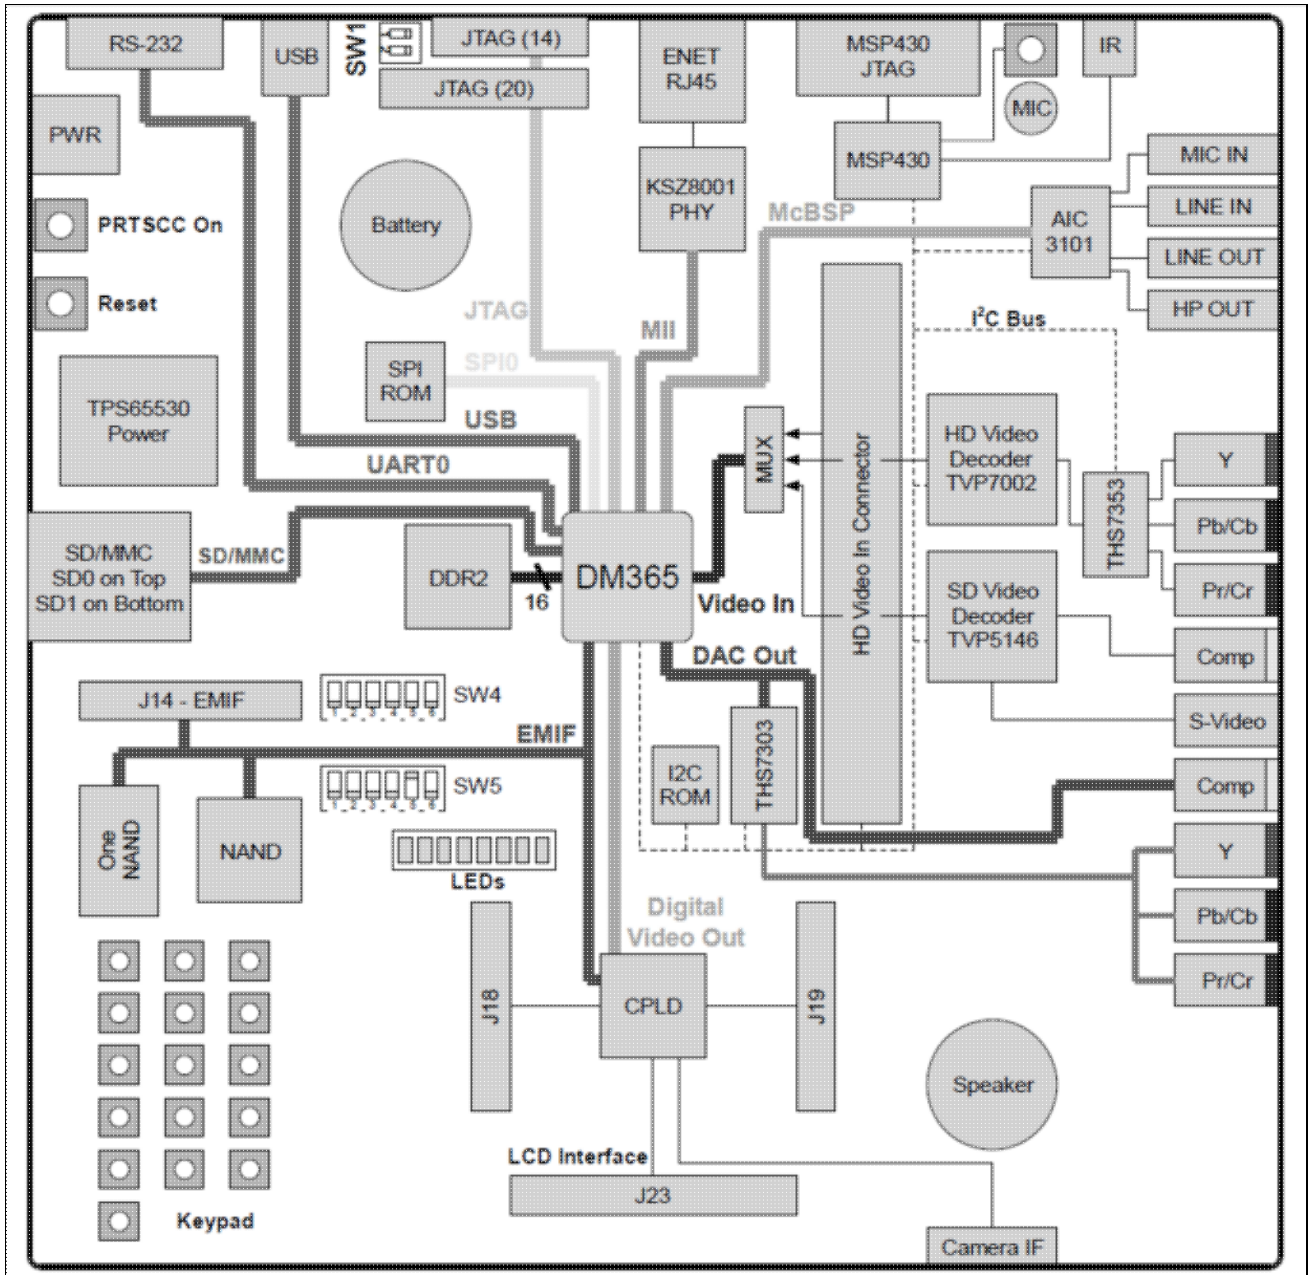

Introduction

This Quick Start Guide (QSG) explains how to set up the TMS320DM365 EVM to show the Out Of Box demo, and how to install the Linux Digital Video Software Development Kit (DVSDK).

The TMS320DM365 Digital Video Evaluation Module (DVEVM) contains the following:

- DM365 EVM Technical Reference Manual (hard copy user's manual)
- Spectrum Digital, Inc. DM365 EVM target board
- Universal power supply and power cords
- Serial cable
- Ethernet cable

TMS320DM365 EVM Quick Start Guide

- Code Sourcery Toolchain, 1 CD-ROM
- Spectrum Digital, Inc. board support software, 1 CD-ROM
- Secure Digital (SD) Media card


Out of Box Linux demo image

TI Digital Video Software Development Kit (DVSDK) installer for Linux development

To view the Out Of Box demo provided with the EVM, you will need this in addition:

- A 720P, 60Hz capable HD display with component input.
- A 720P, 60Hz capable HD video source (e.g. camera, Blue Ray DVD player, etc.).
- A stereo audio source (CD, laptop etc.) which can be connected to a 3.5mm stereo jack.
- A stereo audio output (speakers, headphones etc.) which can be connected to a 3.5mm stereo jack.
- A USB mouse
- A USB Female Standard-A to Male Mini-B Adapter (if the mouse has a USB Standard-A connector)


To develop software using the Linux Digital Video Software Development Kit(DVSDK), you will also need a Linux development host. The **only** supported Linux host distribution is currently Ubuntu 10.04 LTS. In addition, the development host machine must have an SD card reader attached.

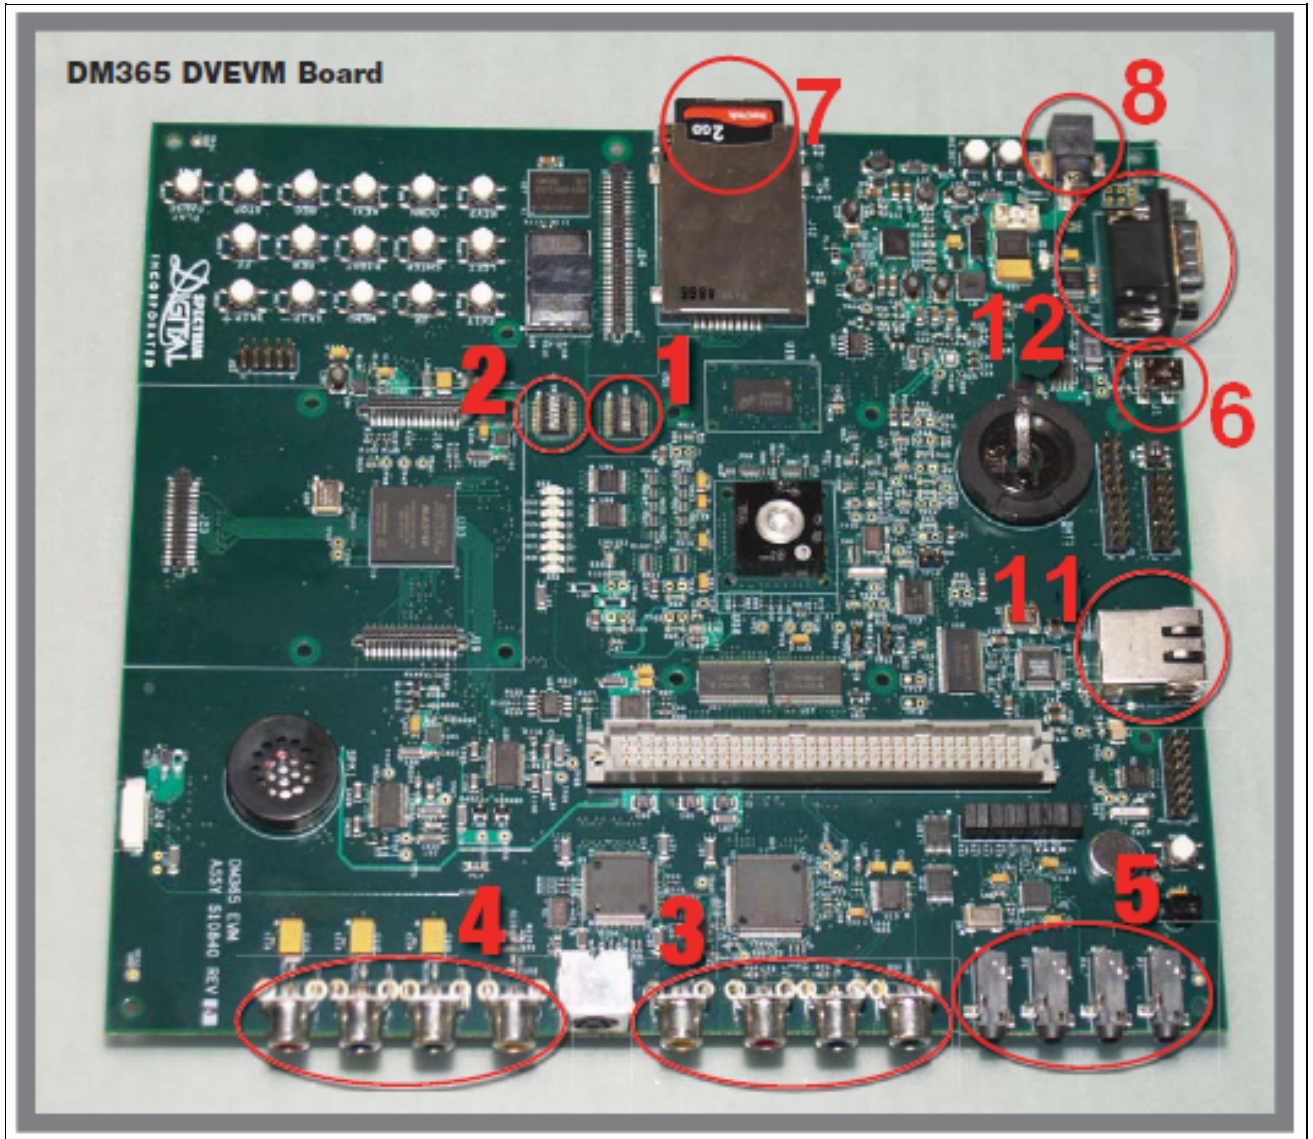


Setting up the EVM for the Out Of Box demo

The steps below have corresponding numbers in the EVM overview picture above.


1. Verify DIP SW4 is configured to SD boot mode.



2. Verify DIP SW5 is configured to 1.35-V core voltage mode and component video output mode.

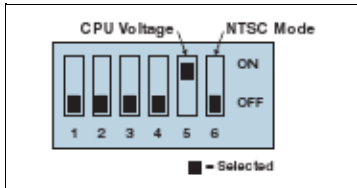


3. Make sure your video source outputs 720P 60Hz, and connect the video source to the component video in the RCA connector. Power on your video source.

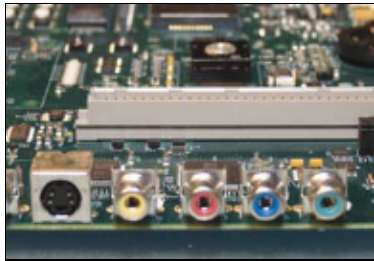

4. Connect your 720P capable HD video display to the component video out RCA connector. Power on the HD video display.



5. Connect an audio speaker to stereo line out and an audio source to stereo line in.

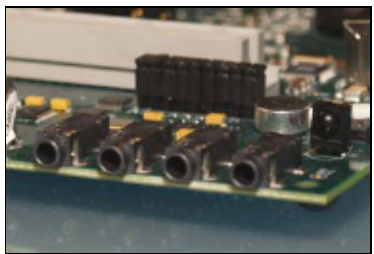


6. Connect a USB mouse to the USB port on the EVM. Given the EVM comes with a mini-USB connector, you may need to use an adapter between your mouse and the connector.




7. Insert the SD card containing the Linux demo image into the SD/MMC slot



8. Connect the power cable to the EVM power jack on the EVM. To be ESD safe, plug in the other end of the cable only after you have connected the power cord to the board.

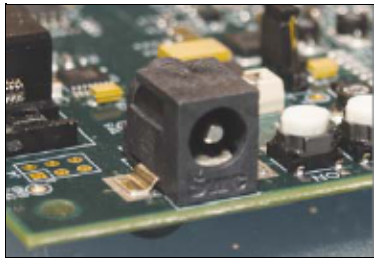

9. Once the EVM board has booted, your video display should show the Matrix application launcher.

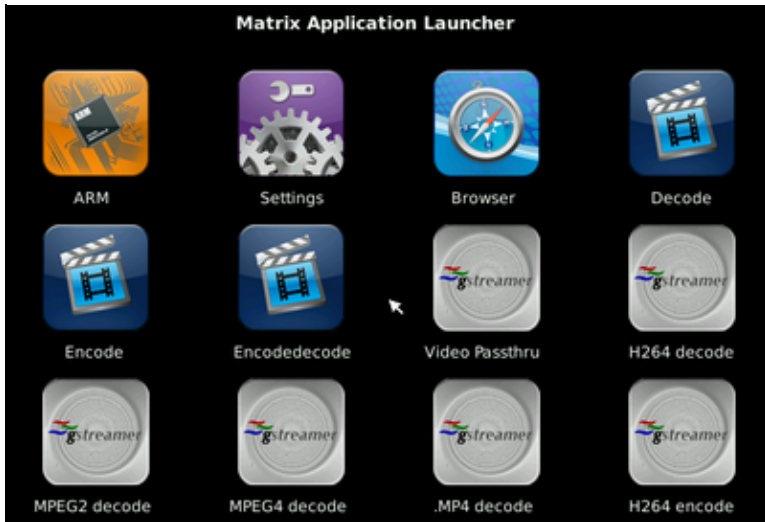


From the Matrix application launcher, you can launch a variety of ARM utilities, multimedia demos and QT browser. Feel free to explore.

Note: If the mouse does not respond, make sure you remember to connect it **prior** to powering up the board. Also, it is possible that the adapter between your mouse and the board is incompatible. One trick is to make sure you use an optical mouse. It would light up if it is powered. If it does not light up, try changing the adapter.


Setting up the EVM for Linux Software Development

In addition to the steps above, the following steps will set up your EVM for Linux software development.

11. Connect the provided Ethernet cable to the Ethernet port on the EVM board. The other end of the cable needs to be connected to a network accessible by your Linux development host.

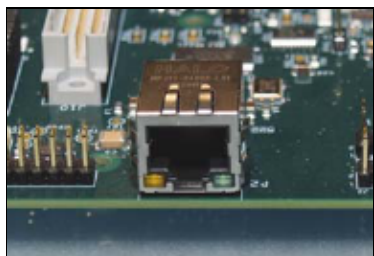

12. Connect the provided RS-232 null modem cable to the EVM UART port. The other end of the cable needs to be connected to your Linux development host.

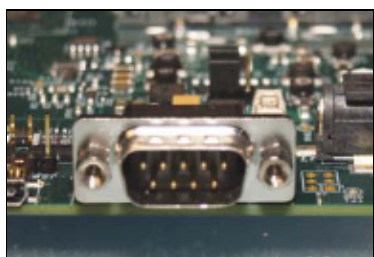

After completing the EVM setup continue with the toolchain and DVSDK installation steps provided on the [DVSDK download page](#).

EVM Hardware Overview

To better understand the DM365 EVM hardware, you may want to review the DM365 EVM Technical Reference which can be found by visiting [Spectrum Digital](#) website.

Software Updates

The latest DVSDK software can be downloaded from the following link:

http://software-dl.ti.com/dsps/dsps_public_sw/sdo_sb/targetcontent/dvSDK/index.html

TI Worldwide Technical Support

Internet**TI Semiconductor Product Information Center Home Page**

support.ti.com

TI Semiconductor KnowledgeBase Home Page

support.ti.com/sc/knowledgebase

Product Information Centers

Americas	Phone	+1(972) 644-5580
Brazil	Phone	0800-891-2616
Mexico	Phone	0800-670-7544
	Fax	+1(972) 927-6377
	Internet/E-mail	support.f.com/sc/pic/americas.htm

Europe, Middle East, and Africa**Phone**

European Free Call	0800-ASK-TEXAS (0800 275 63927)
International	+49 (0) 8161 80 2121
Russian Support	+7 (4) 95 98 10 701

Note: The European Free Call (Toll Free) number is not active in all countries. If you have technical difficulty calling the free call number, please use the international number above.

Fax	+49 (0) 8161 80 2045
Internet	support.ti.com/sc/pic/euro.htm

Japan**Fax**

International	+81-3-3344-5317	Domestic	0120-61-0036
Internet/E-mail			
International	support.ti.com/sc/pic/japan.htm		
Domestic	www.tij.co.jp/pic		

Asia**Phone**

International	+91-80-41381665		
Domestic	Toll-Free Number		Toll-Free Number
Australia	1-800-999-084	Malaysia	1-800-80-3973
China	800-820-6682	New Zealand	0800-446-934
Hong Kong	800-96-5941	Philippines	1-800-765-7404
India	1-800-425-7868	Singapore	800-886-1028
Indonesia	001-803-8861-1006	Taiwan	0800-006800
Korea	080-551-2804	Thailand	001-800-886-0010
Fax	+886-2-2378-6808	E-mail	tiasia@ti.com
Internet	support.ti.com/sc/pic/asia.htm		ti-china@ti.com

C093008

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

The platform bar and DaVinci are trademarks of Texas Instruments.

All other trademarks are the property of their respective owners.

510850-4001 B
SPRM352A

© 2009 Texas Instruments Incorporated