




- Re-entrant safe driver

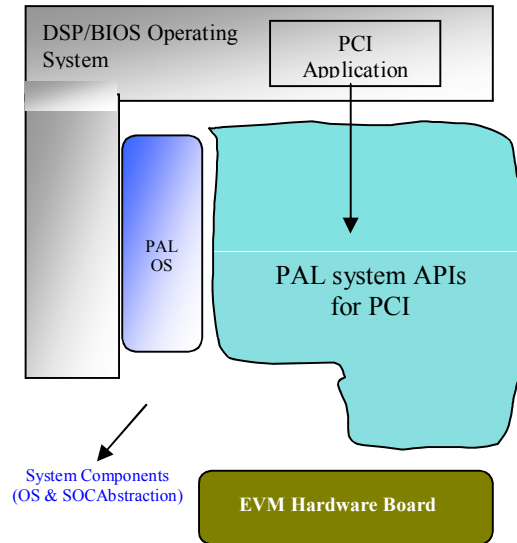

Description

Refer system level release notes for tools and BIOS versions.



Capabilities

The PAL SYS PCI DSP/BIOS device driver adopts a scalable architecture that eases customization/extension

- Isolates H/W and OS Accesses, Easy to maintain & re-target to new platforms
- Can stack custom-functions along control/data-path to realize “driver filters”

The driver is constituted of following sub components:

- PCI – OS Independent part of PCI Driver Core.
- System components – PALOS: BIOS Abstraction

The following table gives a quick overview of the supported API services. For help on interfaces refer to the PAL SYS PCI Driver Help File:

PAL_sysPCICreate()	Create the instance of PCI driver.
PAL_sysPCIDelete()	Delete the instance of PCI driver.
PAL_sysPCIOpen()	Open the driver instance of PCI driver.
PAL_sysPCIClose()	Close the driver instance of PCI driver.
PAL_sysPCIEnableInterrupt()	Enables PCI interrupt/s.
PAL_sysPCIDisableInterrupt()	Disables PCI interrupt/s.
PAL_sysPCISetMemMapReg()	Set memory mapped register.
PAL_sysPCIGetMemMapReg()	Get memory mapped register.
PAL_sysPCISetHookReg()	Set Hook register
PAL_sysPCIGetHookReg()	Get Hook register
PAL_sysPCIEnableBasePrefetch()	API to Enable Prefetch for a base address register.
PAL_sysPCIDisableBasePrefetch()	API to disable Prefetch for a base address register.
PAL_sysPCIProgramCacheLineSize	API to set Cache line size
PAL_sysPCIProgramLatencyTimer()	API to set Latency timer

PRODUCT PREVIEW



Driver Performance Characteristics:

PCI DEVICE DRIVER SUB-COMPONENT	PROGRAM MEMORY (IN BYTES)	DATA MEMORY (IN BYTES)		
		MEMORY TYPE		TOTAL
		INITIALIZED	UN INITIALIZED	
<PAL SYS-PCI>	6876	19	20	6915
Total	6876	19	20	6915

- System Components Total Memory (Code & Data): **6915** Bytes

Note: The Driver Performance Characteristics can be included once testing is done on DM648/C6452 SOC.

Performance and Profiling Characteristics for DM648/C6452:


Driver Profiling Characteristics

API Profiled	Trial-1	Trial-2	Trial-3	Trial-4	Trial-5	Average (usec)	Maximum (usec)	Minimum (usec)
PAL_sysPCICreate	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
PAL_sysPCIOpen	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
PAL_sysPCIGetHookReg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCISetHookReg	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PAL_sysPCIEnableInterrupt	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCIDisableInterrupt	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PAL_sysPCIProgramLatencyTimer	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PAL_sysPCIProgramCacheLineSize	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCIEnableBasePrefetch	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCIDisableBasePrefetch	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCISetMemMapReg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCIGetMemMapReg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCIEnableBasePrefetch	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCIDisableBasePrefetch	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCIClose	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PAL_sysPCIDelete	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

PRODUCT PREVIEW



Driver Performance Characteristics

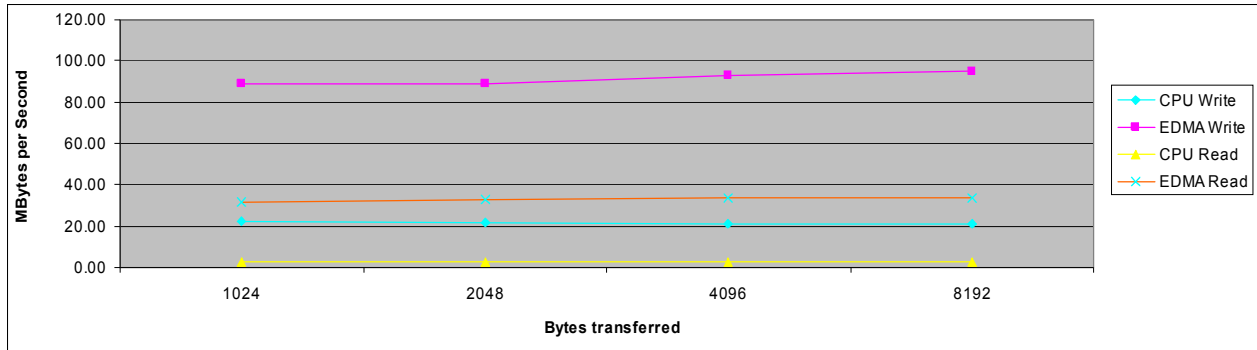

Test Setup Information	Buffer Size (Bytes)	CPU Write		EDMA Write		CPU Read		EDMA Read	
		Time (usec)	Mbytes /Sec	Time (usec)	Mbytes /Sec	Time (usec)	Mbytes /Sec	Time (usec)	MBytes/Sec
Kailash EVM inserted in PCI slot of Linux Host	1024	44.00	22.19	11	88.78	355	2.75	31	31.50
	2048	91.00	21.46	22	88.78	709	2.75	59	33.10
	4096	184.00	21.23	42	93.01	1419	2.75	117	33.39
	8192	369.00	21.17	82	95.27	2847	2.74	232	33.67

Comments:	
Frequency - 33MHz	33000000
Data Bus Width - 4 Bytes	4
Theoretical Value (Bytes/sec)	132000000
Hardware Details: Host	Dell GX260
Software : Linux Version	2.6.9
Note: The CPU and EDMA data transfer were done from DM648 board EDMA transfers were done in ABSYNC mode	

References

- [1] PAL SYS PCI Module Hardware Specifications
- [2] BIOS Documentation from TI
- [3] PAL SYS PCI Device Driver Documentation

PRODUCT PREVIEW



PRODUCT PREVIEW

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Copyright © 2007 Texas Instruments Incorporated. All rights reserved.

Information in this document is subject to change without notice. Texas Instruments may have pending patent applications, trademarks, copyrights, or other intellectual property rights covering matter in this document. The furnishing of this documents is given for usage with Texas Instruments products only and does not give you any license to the intellectual property that might be contained within this document. Texas Instruments makes no implied or expressed warranties in this document and is not responsible for the products based from this document. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Texas Instruments assumes no obligation regarding future manufacturing unless otherwise agreed to in writing.